



NORDCONTENITORI®




VYNAGRIP

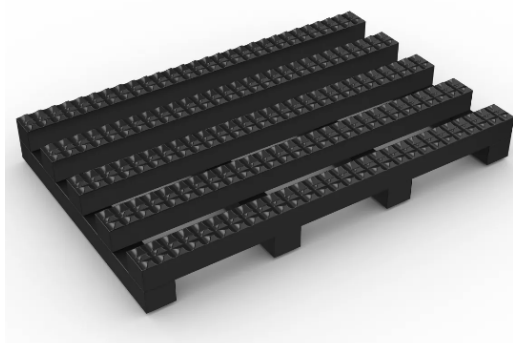

BLACK



RED



BLUE



BLACK WITH
YELLOW BANDS

STANDARD SIZES

HEIGHT 15 mm

STANDARD ROLL OPTIONS

5 x 0,6 m

5 x 0,91 m

5 x 1,22 m

WEIGHT 7,60 kg/m²

TECHNICAL INFO

Acoustic

Excellent sound absorption.

Anti-fatigue

10% reduction in fatigue (University of Hertfordshire study, 1997).

Chemical

Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet

Composition

Flexible Polyvinyl Chloride (PVC)

Electrical

BS 2782: Part 2 Method 230A.

Insulation resistance

> 2000M Ω

Nordcontenitori Sas
Via Bergamo, 9 – 24030 Medolago (BG) – P.I. 01314040161
Tel. 035/902667 – Fax 035/902710
www.nordcontenitori.com



Electric strength	= 12,600 volts
Environment	Vynagrip and Vynagrip Plus is 100% recyclable. When manufactured in black, Vynagrip and Vynagrip Plus is made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Fire	EN ISO 13501-1:2007-Cfl-SI
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet.
Slip resistance	ASTM E303 Dry/Wet with lines along-lines across 87-104 /72-88 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation. The red colour isn't colourfast in direct sunlight.